


RUBBERBOND PRESSURE-SENSITIVE MOLDED WALKWAY PADS

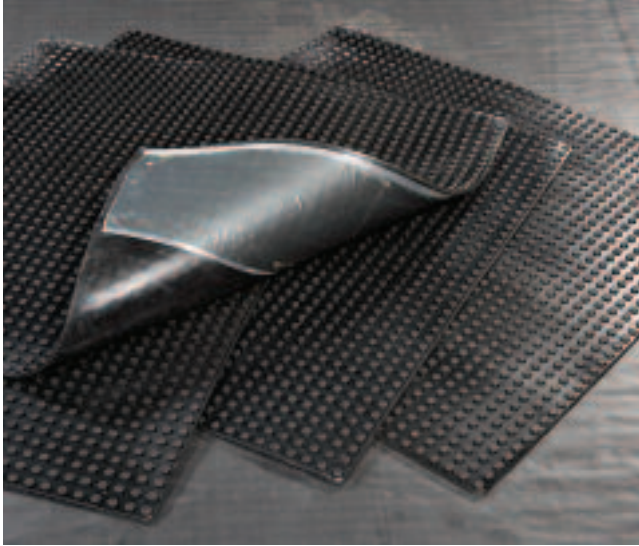

Overview

Let us simplify your next EPDM installation with their Pressure-Sensitive Walkway Pads. The Carlisle Walkway Pad is designed to protect the membrane in those areas exposed to repetitive foot traffic.

Intended Uses

1. Walkways must be installed at all traffic concentration points (i.e., roof hatches, access doors, rooftop ladders, etc.) regardless of traffic frequency.
2. Walkways must also be installed if regular maintenance (once a month or more) is necessary to service rooftop equipment.

Features and Benefits

- Excellent tear and puncture resistance
- UV resistant
- Slip resistant

Pressure-Sensitive Molded Walkway Pads	
Typical Properties and Characteristics	
Color	Black & White
Pad Thickness	min - .162 max - .202
Performance Requirements Density, pct	70
Tensile Strength, psi ASTM D 412 Unaged	500
Tear Resistance, ppi ASTM D 624 Unaged	250
Packaging	30 inches X 30 inches - 50 per skid (76 cm X 76 cm)

Installation *

1. Remove excess dust and dirt from the membrane by wiping with a clean rag. To remove accumulated dirt, footprints, etc., scrub the membrane sheets with warm low-sudsing soap and water and rinse with clean water.
2. Clean the dry membrane surface by scrubbing with clean natural fiber rags using Weathered Membrane Cleaner. Use HP-250 Primer to prime EPDM Membrane when adhering pads.
3. Adhere Walkway Pads using HP-250 Primer. Apply primer to deck surface where tape will contact deck surface.
4. Allow a 25 mm wide break between Walkway Pads. Discontinue Walkways over field splices allowing a minimum 25 mm gap.

* REVIEW CURRENT SPECIFICATIONS AND DETAILS FOR SPECIFIC APPLICATION REQUIREMENTS.

Precautions

The product is to be used as a walkway only and is not designed as a substitute for ballast. Walkway Pads/Rolls cannot be installed within 10' (3 m) of the roof perimeter or on projects which exceed 50' (15 m) in height for Design "B" systems. Concrete pavers may be used in these areas. When installing walkways in conjunction with ballast, avoid the entrapment of small ballast below walkways.

Roofing the World for Over 50 Years

Exclusive UK & Ireland distributors for Carlisle-Syntec and RubberBond EPDM

- Email: enq@rubberbond.co.uk • www.rubberbond.co.uk
- Tel: +44 (0) 1494 448792 • +44 (0) 1494 465393
- Flex-R Ltd., Unit 5 Central Park, Bellfield Road, High Wycombe, Bucks. HP13 5HG



Roofing the world for over 50 years